



DC power supply for plasma 1500 W, 1000 V 2A ALP 15K 56M230 FST



This power supply uses a switch-mode power supply technology providing a smaller footprint (19 "rack 2U), good power stability and efficiency over 90%.

It was created specifically for plasma application; it incorporates the following functions:

- arc detection and removal
- plasma ignition
- ramp





Technical characteristics

Reference	ALP 15K 56M230 FST
Presentation	Switch-mode power supply ($\eta > 90 \%$). Connection cable of 4 m. Other lengths upon request.
Output power	Up to 1500 W – Voltage: 200 V to 1000 V – Current: 30 mA to 2 A
Ignition voltage	950 V
Power stability	$< 1 \%$ from 10 % to 100 % of the available maximum power
Ripple	$< 2 \%$ RMS from 10 % to 100 % of the available maximum power
High voltage output	Female connector SHV
Mains	208 – 230 V $\pm 6 \%$, 1-phase + neutral
Regulation mode	Voltage / current / power
Local control mode	Local / analog remote control / RS 232
Remote control mode	Modbus RS232 / Modbus RS422 et RS485 / CANopen® / Profibus®
Dimensions	440 × 465 × 88,8 mm (2U)
Cooling	Air
Safety	Safety relay and free contact to be shunted
EC standards	EN 61010-10 ; EN 61000-6-4 ; EN 61000-6-2



12 porte du Grand Lyon, 01700 Neyron, France, www.sairem.com
Tel : +33 (0)4 72 01 81 60, E-mail : commercial@sairem.com

Toutes les informations et les caractéristiques dimensionnelles et électriques affichées sur les documents commerciaux et les fiches techniques ne sont données qu'à titre indicatif et ne sont pas contractuelles. Elles sont susceptibles de modification sans préavis.

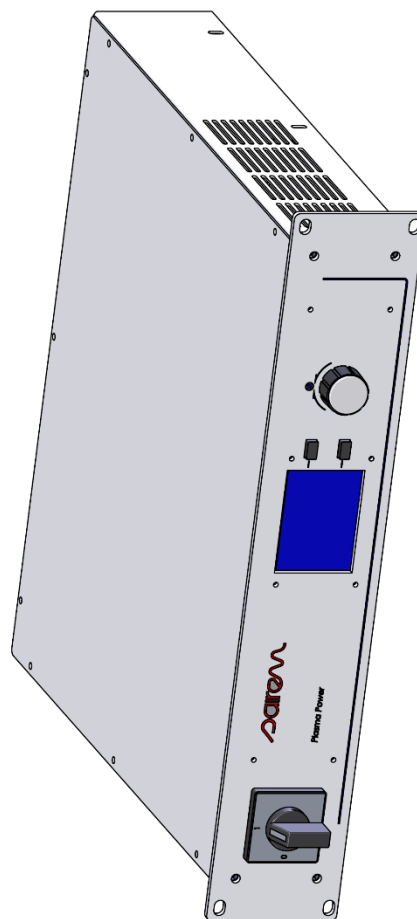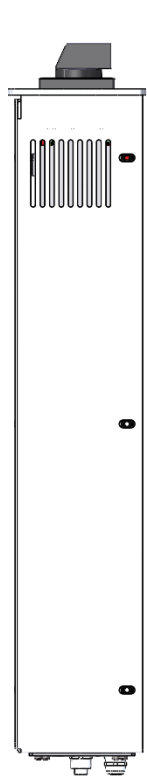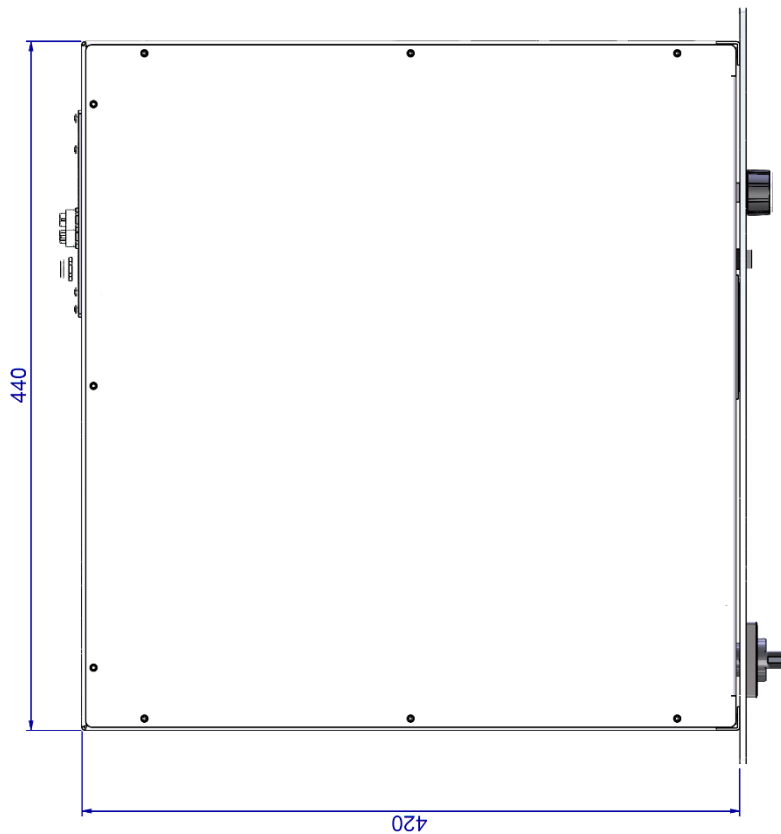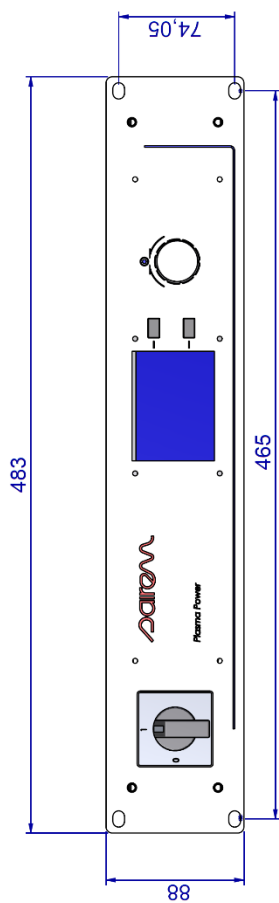

TITRE:
ALP15K56M230FST

FORMAT: A3

DESSIN NO.

3148-ENS-ALP750

ECHELLE: 1:3

WEIGHT: 6.22



12, Porte du GRAND LYON
01700 NEYRON - FRANCE
Tél : +33 (0) 72 01 81 60 Fax : 04 72 01 81 79
www.sairem.com

EMISSION ORIGINALE
MODIFICATION DU DESSIN

13/10/2016 BDE
DATE DESSINE

INDEXE

VERIFIE APPROUVE